

4" 95 PR10 95 PRX10 95 PRG10




CARATTERISTICHE IDRAULICHE - HYDRAULIC PERFORMANCES

Q= Portata - Capacity - Debit **50 Hz n= 2900 min**

| Tipo Type | Power | | V230 Single Phase | | V400 Three Phase A | l/min | 0 | 100 | 125 | 150 | 175 | 200 | 225 | 250 | |
|--------------|-------|-----|----------------------|----|-----------------------------|-------|-------------------|-----|------|------|------|------|------|------|------|
| | kW | HP | A | µF | | | l/sec | 0 | 1,67 | 2,08 | 2,50 | 2,92 | 3,33 | 3,75 | 4,17 |
| | | | | | | | m ³ /h | 0 | 6 | 7,5 | 9 | 10,5 | 12 | 13,5 | 15 |
| 95 PR10 N/04 | 0,75 | 1 | 6,5 | 30 | 2,2 | H(m) | 31 | 24 | 22 | 20 | 18 | 14 | 12 | 9 | |
| 95 PR10 N/05 | 1,1 | 1,5 | 9,4 | 40 | 3 | | 39 | 30 | 28 | 25 | 22 | 18 | 15 | 11 | |
| 95 PR10 N/07 | 1,5 | 2 | 11,5 | 50 | 4 | | 54 | 42 | 39 | 35 | 31 | 25 | 21 | 15 | |
| 95 PR10 N/10 | 2,2 | 3 | 14,7 | 75 | 5,7 | | 77 | 60 | 55 | 50 | 44 | 36 | 30 | 22 | |
| 95 PR10 N/14 | 3 | 4 | - | - | 7,4 | | 108 | 83 | 77 | 70 | 62 | 50 | 42 | 31 | |
| 95 PR10 N/19 | 4 | 5,5 | - | - | 10 | | 146 | 113 | 105 | 95 | 84 | 68 | 57 | 42 | |
| 95 PR10 N/26 | 5,5 | 7,5 | - | - | 13,5 | | 200 | 155 | 143 | 130 | 114 | 94 | 78 | 57 | |
| 95 PR10 N/35 | 7,5 | 10 | - | - | 18 | | 270 | 208 | 193 | 175 | 154 | 126 | 105 | 77 | |

DIMENSIONI D'INGOMBRO E PESI - OVERALL DIMENSIONS AND WEIGHTS

| Type | A mm Single Phase V 230 | A mm Three Phase V 400 | B mm | C mm Single Phase V 230 | C mm Three Phase V 400 | M Kg Single Phase | M Kg Three Phase | P Kg |
|--------------|-------------------------------|------------------------------|------|-------------------------------|------------------------------|----------------------|---------------------|------|
| 95 PR10 N/04 | 736 | 711 | 374 | 362 | 337 | 10 | 10 | 4 |
| 95 PR10 N/05 | 807 | 777 | 415 | 392 | 362 | 12 | 12 | 4 |
| 95 PR10 N/07 | 919 | 889 | 497 | 422 | 392 | 13 | 13 | 5 |
| 95 PR10 N/10 | 1087 | 1072 | 620 | 467 | 452 | 15 | 15 | 6 |
| 95 PR10 N/14 | - | 1341 | 784 | - | 557 | - | 19 | 7 |
| 95 PR10 N/19 | - | 1586 | 989 | - | 597 | - | 22 | 9 |
| 95 PR10 N/26 | - | 1974 | 1276 | - | 698 | - | 27 | 12 |
| 95 PR10 N/35 | - | 2463 | 1645 | - | 818 | - | 32 | 15 |

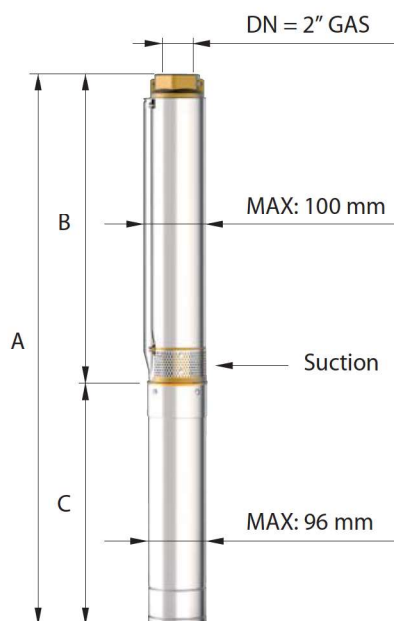

Versioni disponibili
Available versions
Versions disponibles
Versiones disponibles



95 PR
Gabbia di aspirazione e mandata in ottone

Suction cage and delivery bowl in brass



95 PRX
Gabbia di aspirazione e mandata in AISI 304 microfuso

Suction cage and delivery bowl in AISI 304 casted



95 PRG
Gabbia di aspirazione e mandata in ghisa con trattamento di cataforesi

Suction cage and delivery bowl in cast iron with CED (Cathode Electro Deposition)



n% = Rendimento della pompa
n% = Rendement de la pompe
n% = Pump efficiency
n% = Rendimiento de la bomba

Max 60%

kW/st = Assorbimento per stadio
kW/st = Absorption par étage
kW/st = Stage absorption
kW/st = Potencia absorbida por etapa

Max 0,210

Tolleranze secondo UNI ISO 9906 livello 3B - Tolerances according to UNI ISO 9906 grade 3B

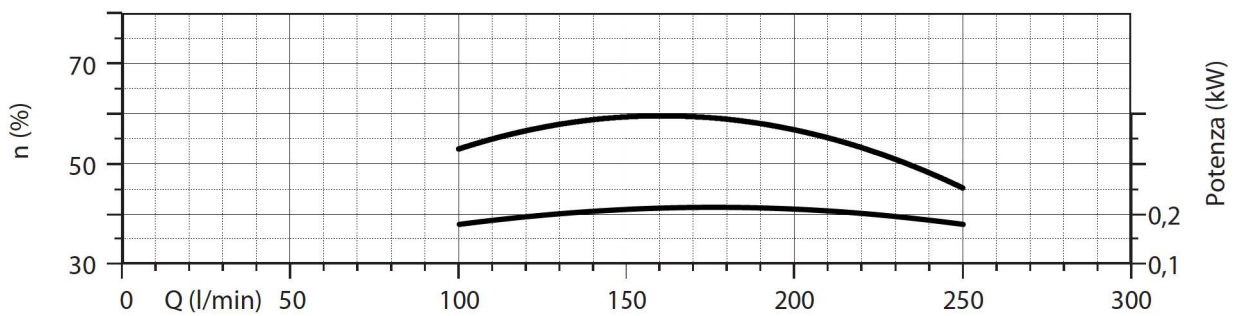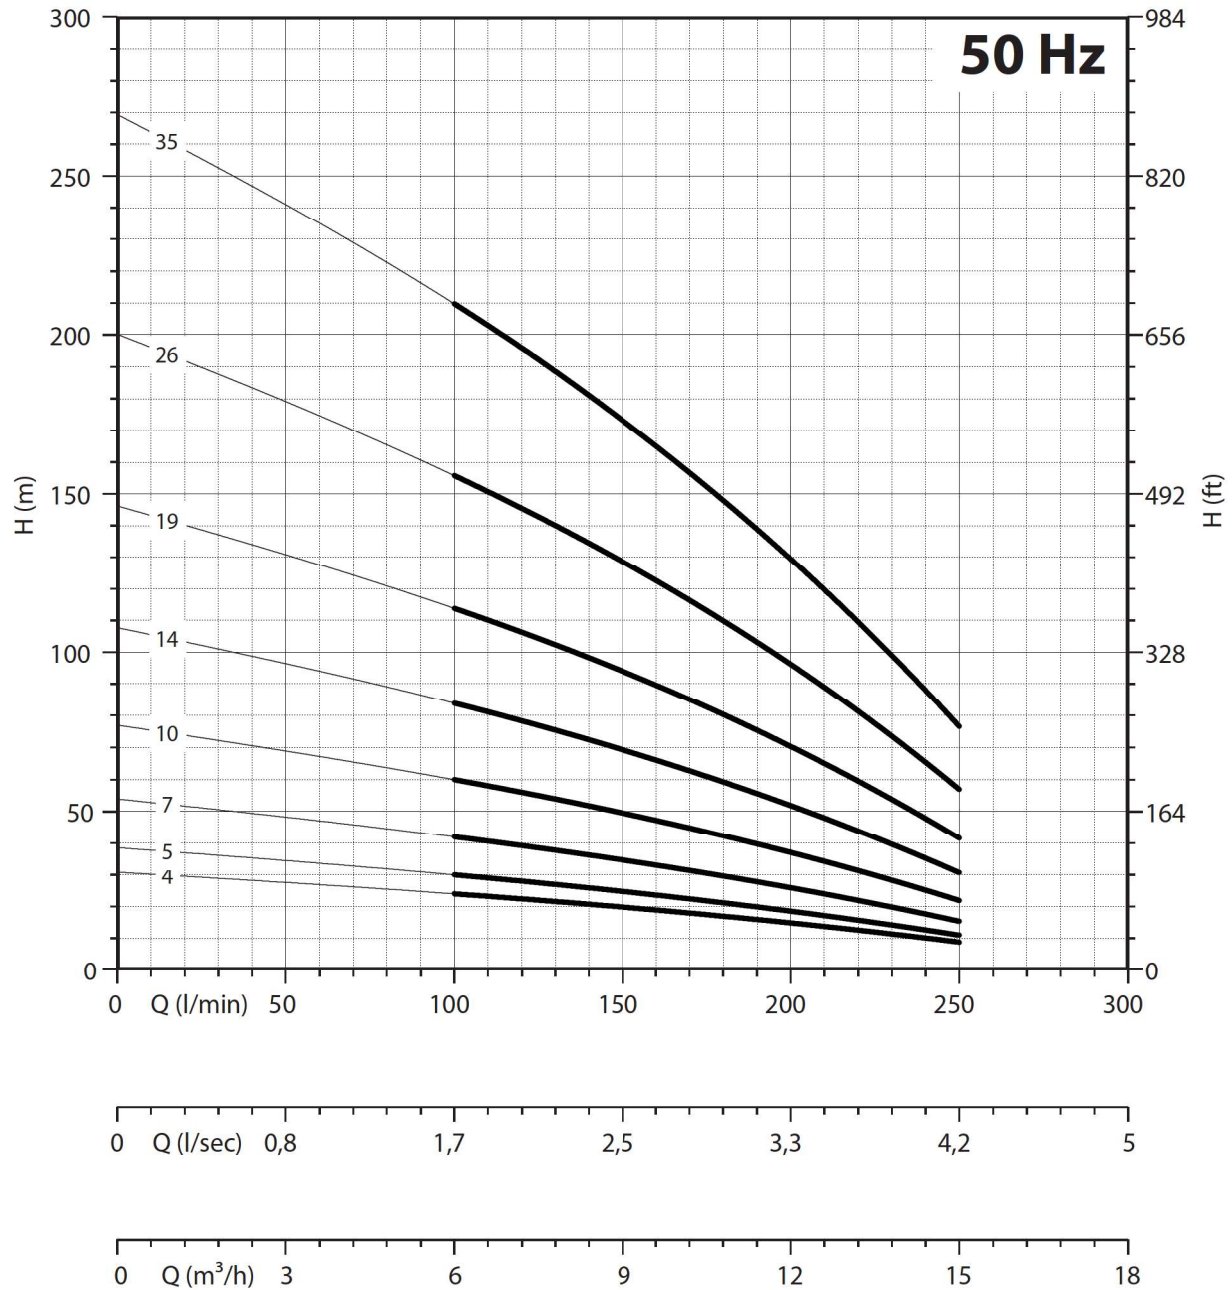

| NPSH (m) | | | 25% | 50% | 75% | 100% |
|----------|-----------|-----------|-----|-----|-----|------|
| 95 PR 10 | 95 PRX 10 | 95 PRG 10 | 2,2 | 2,2 | 3 | 4,8 |